


# PREMIER RANGE

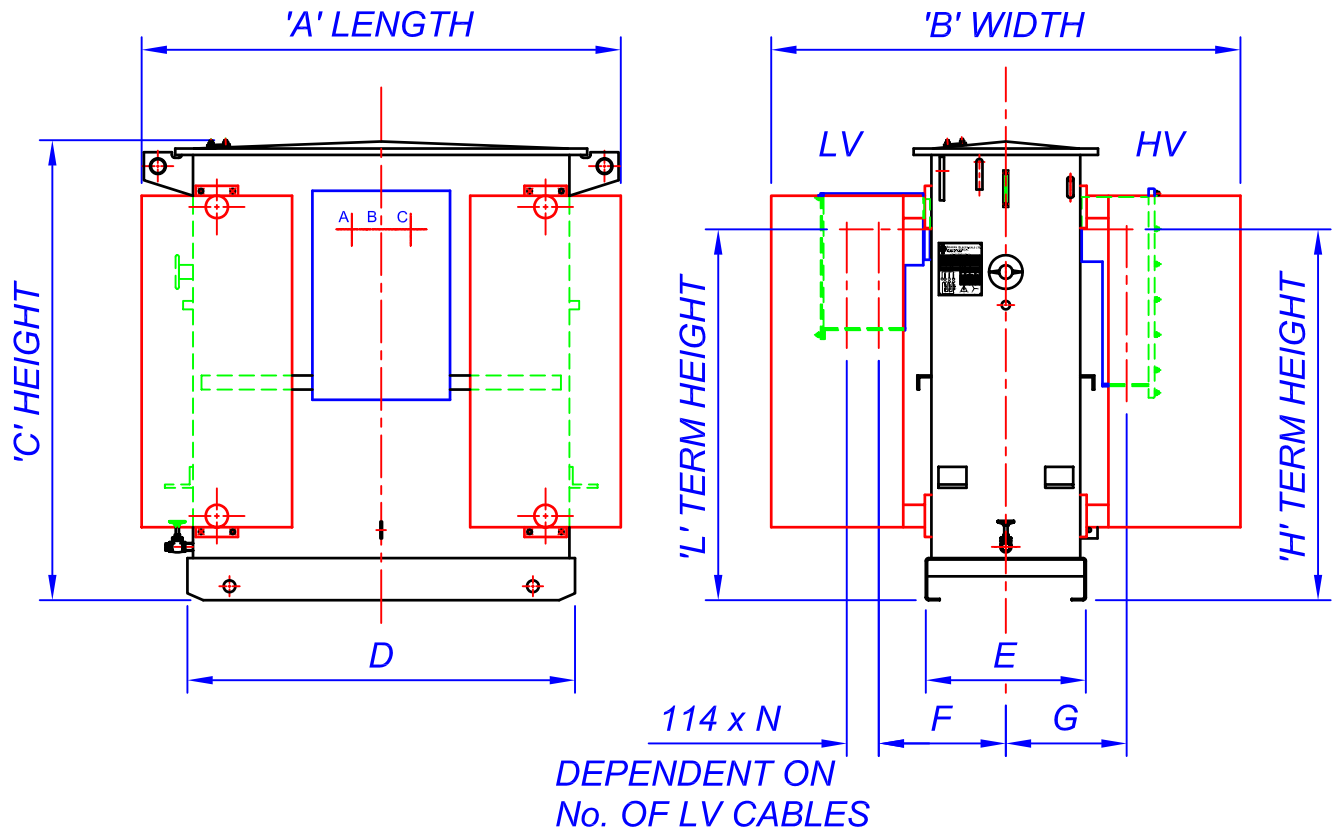

kVA	A	B	C	D	E	F	G	L	H	OIL LTR.S	WEIGHT KG
100	1,163	958	1,370	680	440	364	364	1,100	1,100	222	730
500	1,668	1,225	1,580	1,100	480	408	385	1,320	1,320	482	1,930
800	1,798	1,475	1,615	1,235	535	435	413	1,320	1,320	640	2,550
1000	1,626	1,589	1,640	1,285	550	442.5	420	1,320	1,320	653	2,815
1250	1,706	1,670	1,640	1,380	570	452.5	430	1,320	1,320	835	3,550
1500	1,706	1,826	1,705	1,390	566	450.5	428	1,320	1,320	852	4,042
1600	1,706	1,826	1,705	1,390	566	450.5	428	1,320	1,320	909	4,290
2000	1,760	1,880	1,765	1,450	610	468	450	1,460	1,460	1,018	4,794
2500	1,936	1,930	1,849	1,615	660	498.5	476	1,650	1,650	1,336	6,200


**TOLERANCE UNLESS OTHERWISE STATED**  
 ± 0.5mm FOR DIMENSIONS UP TO 250mm:  
 ± 1mm FOR DIMENSIONS UP TO 1000mm:  
 ± 2mm FOR DIMENSIONS OVER 2000mm.

This drawing is **COPYRIGHT** and the property of **Bowers Electricals Ltd** it must not be copied (in whole or in part) without prior written consent of the company. ©

**REGISTERED FIRM**  
**BM TRADA**  
 CERTIFICATION

**UKAS**  
 QUALITY MANAGEMENT  
 012

**ISO 9001 : 2000**

Drawn by <b>C.MEESE</b>	Checked by <b>SH</b>	Approved by <b>DN</b>	Drg. Size <b>A4</b>	Date <b>09/05/02</b>	Scale <b>NTS</b>
<b>BASIC DIMENSION SHEET FOR BOWERS STANDARD 11000-433V TRANSFORMERS</b>			<b>DRG No. BE2576</b>		
			 <b>FIRST ANGLE</b>	Revision <b>1</b>	